


Samika Fan

Wall/Ceiling/Window Extract Fan (100/150mm)



- Adaptive ventilation
- SMART Technology – more efficient, more effective
- Eliminates mold and condensation
- Low Carbon usage
- 6 Speed touchpad option
- IPX 4 Rated

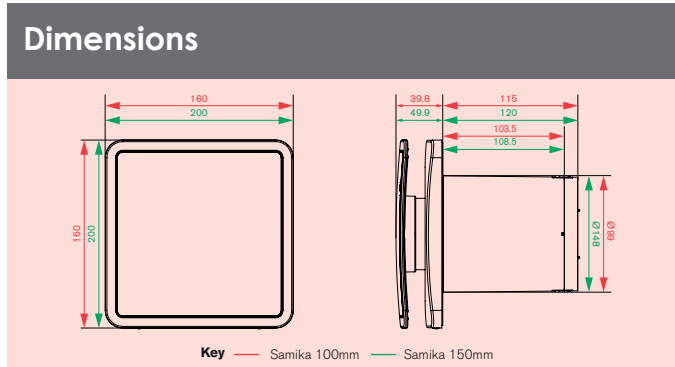

Accessories

ED1/ED150 Easyfix ducting plastic wall liner with integral screw-fixing channels for one visit installation.	
EG1/EG2 Fixed blade louvred grille in semi-matt ABS plastic. UV stabilised. Choice of white or brown grille.	
FF100 Fast fix wall duct system. Comprises 100mm PVC duct with external wall duct seal and external grille. Choice of white or brown grille.	
Flexiduct Flexible 100mm & 150mm PVC ducting.	
GG42 External louvred wall vent, available in white or brown.	
Samika Secure Window Kit 100mm and 150mm (4-28mm glazing). Comprises external louvred grille, adaptor and internal adaptor.	

Physical Specifications

Weight: 100mm fan – 0.9kg
100mm SELV – 1kg
150mm fan – 1.2kg


Material: White gloss finish ABS plastic

Electrical Specifications

220 - 240V ~50Hz Class II

Consumption: Min 1.6W - Max 11.6W

Cabling: Fixed flat wiring - 2 core 1mm², 3 core 1/1.5mm²
SELV Circular wiring - 3 core 0.75mm²

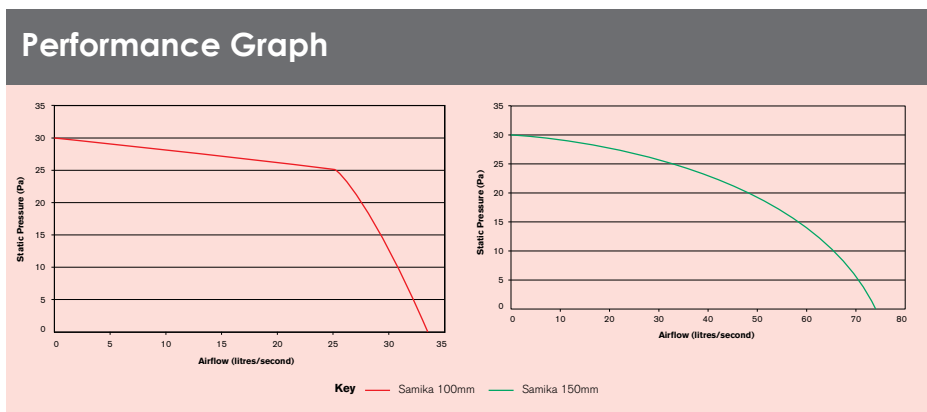

Data Table

Product	Fan Setting	Airflow l.s	Sound Pressure Level		Energy Consumption (W)	
			Min	Max	Min	Max
Samika 100mm	W.C.	6	25	45	1.6	11.6
	Bathroom	15	25	45	1.6	11.6
Samika 150mm	Utility Room	30	29	47.5	1.6	11.6
	Kitchen	60	29	47.5	1.6	11.6